

Material





Screw:M3.0,steel,Zinc plating
Wire protector:Stainless Steel
Terminal:Brass, Tin plating
Housing:PA66, UL94V-0

Electrical

Rated Voltage: 300V
Rated Current: 10A
Contact Resistance: 20mΩ,
Insulation Resistance: 500mΩ/DC500V
Withstand Voltage: AC2000V/1min
Wire Range: 22-14AWG 0.5-2.0mm²

Mechanical

Temp. Range: -40° C/+105° C
Max Soldering: +250° C 5Sec.
Torque: 0.5Nm: (4.425lb. in)
Strip Length: 5.0-6.0mm

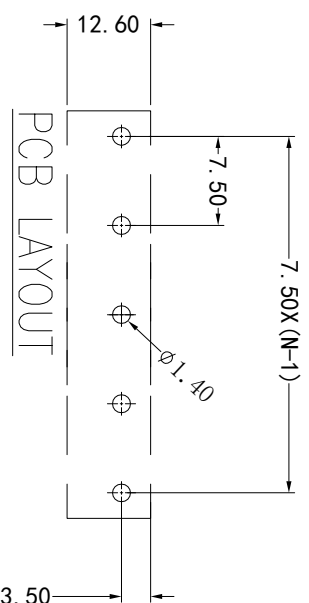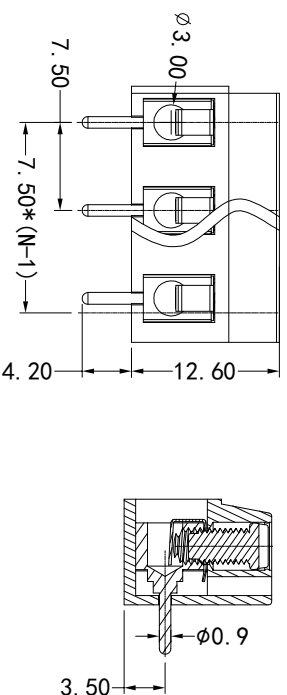

间距公差/Spacing tolerance (mm)			—																								
0---5	6---12	13---24	0.1/10																								
±0.15	±0.30	±0.50	≤ ±2°																								
LUPUOZ 慈溪市禄普电子有限公司 CIXI LUPU ELECTRONICS CO., LTD.									PART NAME:			LP300R-7.50-NP															
									DRAWING NO.:																		
									TYPE: CUSTOMER DRAWINGS																		
									REV		SIZE		SHEET														
0---30		31---50		51---80		81---120		>121		STATUS		APPD		CHKD		DRFT		DATE		CUSTOM		 		UNITS		SCALE	
±0.30		±0.50		±0.70		±1.05		±1.20				Z/H						2022.4.29				MM					