

Material



Screw:M3.0, steel, Zinc plating
Wire protector:Stainless Steel
Terminal:Brass, Tin plating
Housing:PA66, UL94V-0

Electrical

Rated Voltage:300V
Rated Current:10A
Contact Resistance:20mΩ,
Insulation Resistance:500mΩ/DC500V
Withstand Voltage:AC2000V/1Min
Wire Range:22-14AWG 0.5-2.0mm²

Mechanical

Temp. Range:-40° C/+105° C
Max Soldering:+250° C 5Sec.
Torque:0.5Nm: (4.425lb. in)
Strip Length:5.0-6.0mm

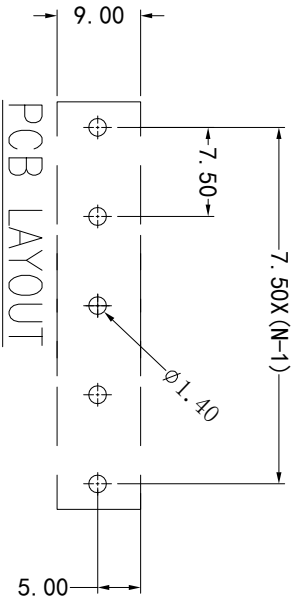

间距公差/Spacing tolerance (mm)			—					
0---5	6---12	13---24	0.1/10					
±0.15	±0.30	±0.50	±2°					
未注公差/general tolerances (mm)								
0---30	31---50	51---80	81---120	>121				
±0.30	±0.50	±0.70	±1.05	±1.20				

STATUS APPD CHKD DRFT DATE CUSTOM   UNITS SCALE								LUPUOZ 慈溪市禄普电子有限公司 CIXI LUPU ELECTRONICS CO., LTD.								PART NAME: LP300-7.50-NP			
								DRAWING NO:											
TYPE:CUSTOMER DRAWINGS																			
REV				SIZE				SHEET											
A				A4				1/1											